


REV	INITIALS	DATE	DESCRIPTION

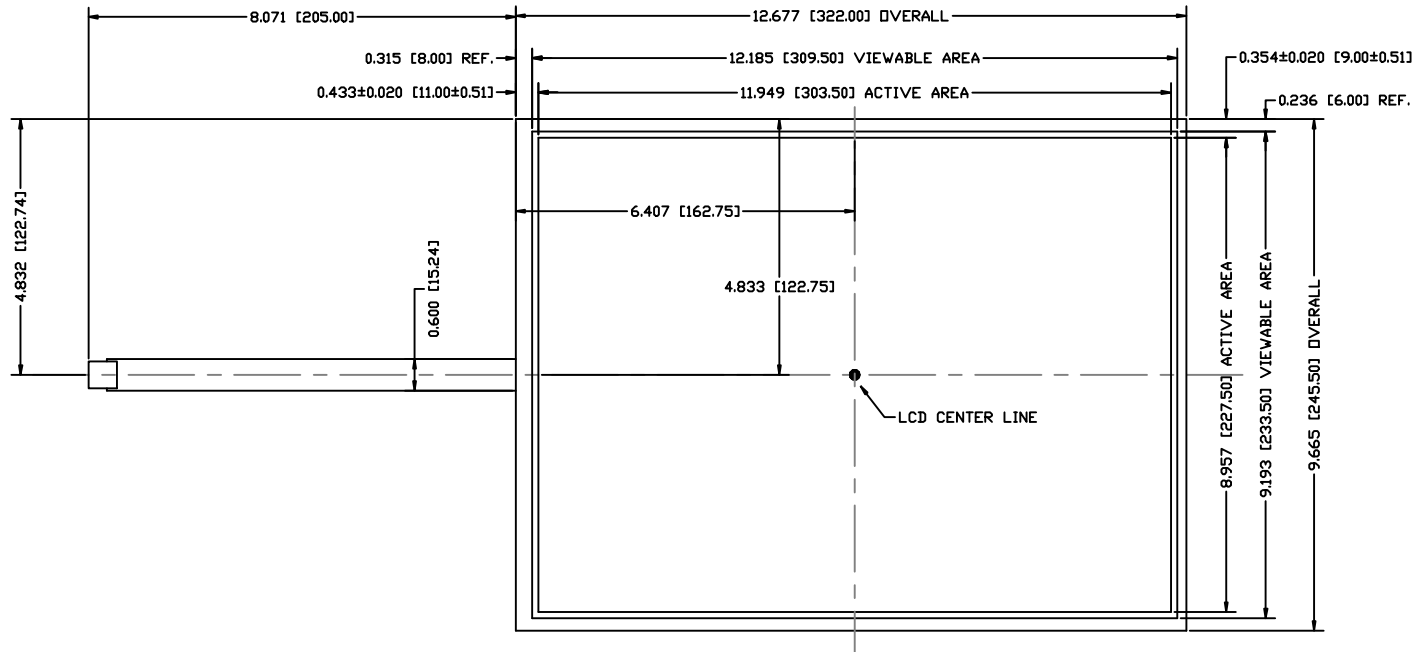

**NOTES:**

1. TOLERANCE  $\pm 0.015$  UNLESS NOTED OTHERWISE.
2. TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH A DIFFUSED SCRATCH RESISTANT COATING.
3. PIN ONE LOCATION IS THE UPPER MOST PIN WHEN VIEWING SCREEN WITH CABLE TO THE LEFT.
4. PINOUT TO BE AS INDICATED.  
 PIN 1 - UPPER RIGHT,  
 PIN 2 - LOWER RIGHT.,  
 PIN 3 - SENSE,  
 PIN 4 - UPPER LEFT,  
 PIN 5 - LOWER LEFT.
5. FLEX TAIL IS TERMINATED USING AMP RECEPTACLE PIN 2-487406-4 WITH HOUSING 487378-4 OR EQUIVALENTS.
6. GLASS SUBSTRATE TO BE .074" THICK GLASS.
7. NOMINAL PANEL THICKNESS IS .087"  $\pm 0.008$ .

BURQUEST TOUCH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55009			
TITLE: 15" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: MLR	DATE: 9/27/07	SCALE: 1:1	TOL: $\pm 0.015$
CHKD:	DATE:	PART NUMBER:	DWG REV
APVD:	DATE:	400384	