



REV	INITIALS	DATE	DESCRIPTION

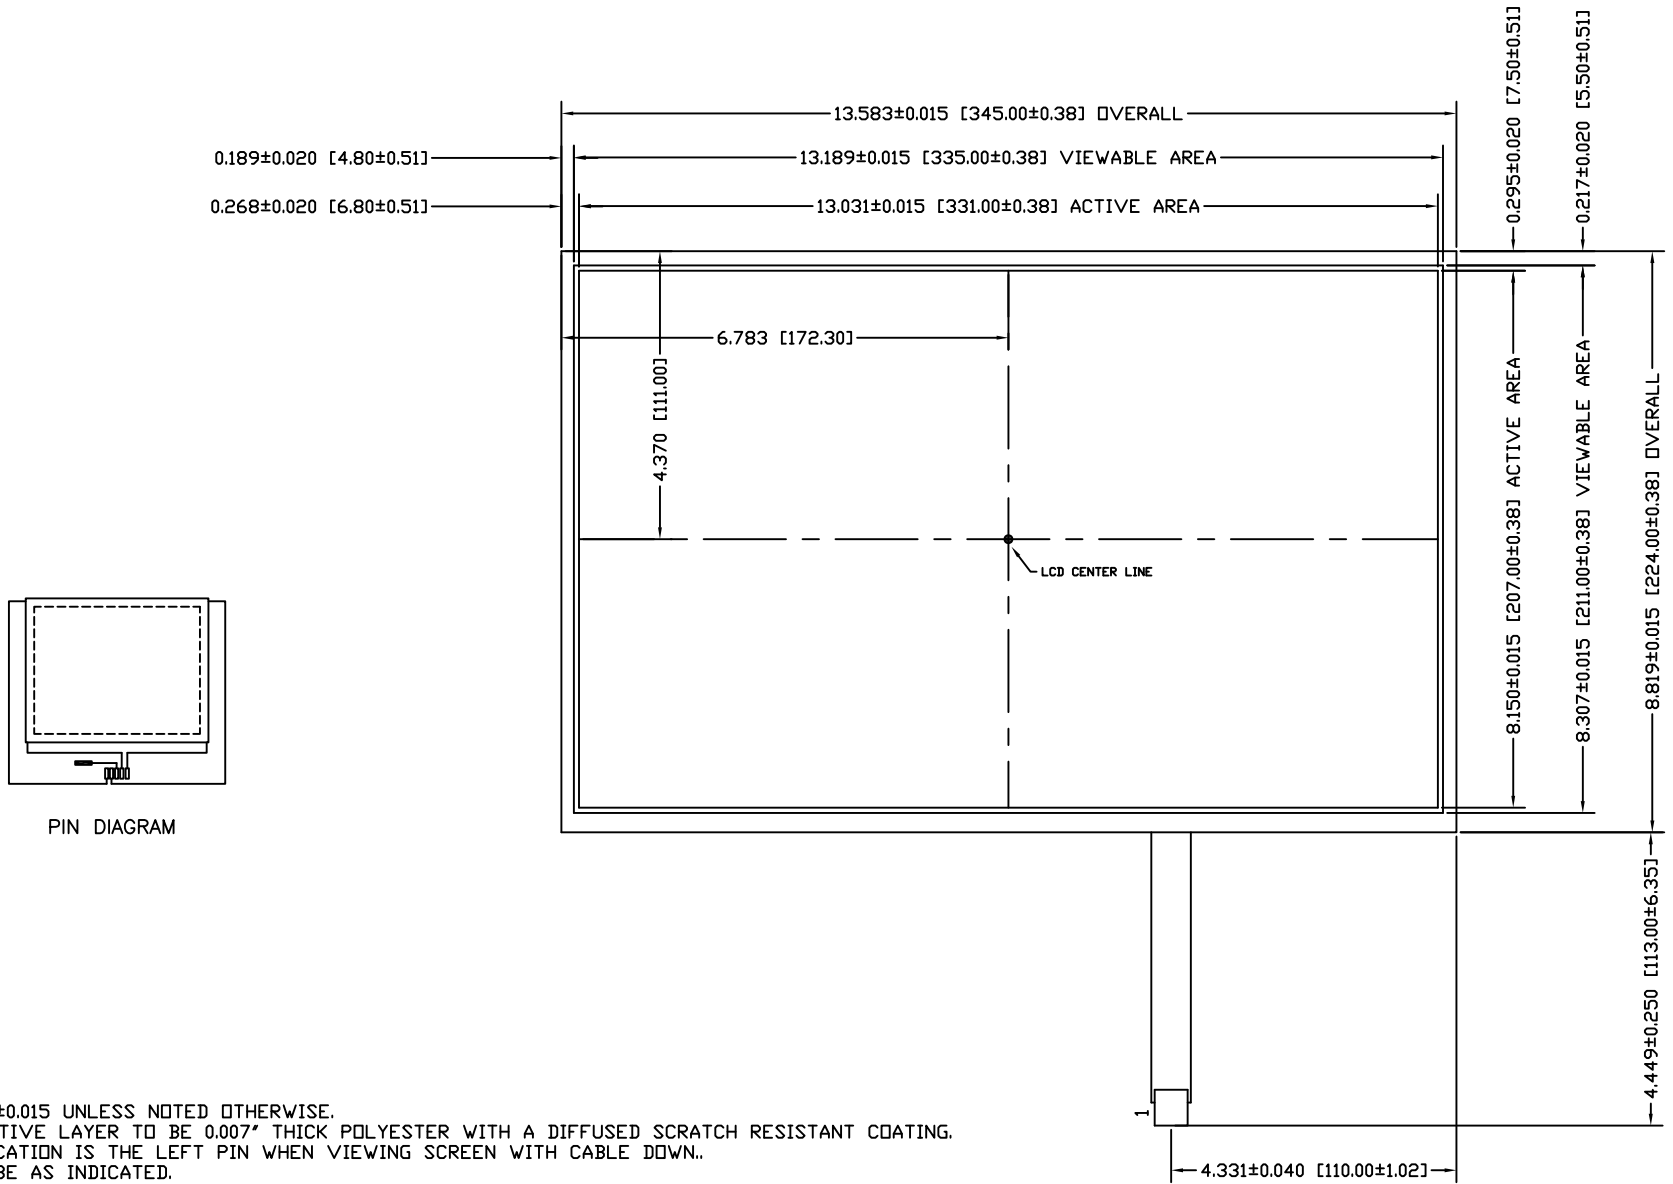

NOTES:

- TOLERANCE ±0.015 UNLESS NOTED OTHERWISE.
- TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH A DIFFUSED SCRATCH RESISTANT COATING.
- PIN ONE LOCATION IS THE LEFT PIN WHEN VIEWING SCREEN WITH CABLE DOWN.
- PINDOUT TO BE AS INDICATED.
 - PIN 1 - UPPER LEFT.
 - PIN 2 - UPPER RIGHT.
 - PIN 3 - SENSE.
 - PIN 4 - LOWER LEFT.
 - PIN 5 - LOWER RIGHT.
- FLEX TAIL IS TERMINATED USING AMP RECEPTACLE PIN 2-487406-4 WITH HOUSING 487378-4 OR EQUIVALENTS.
- GLASS SUBSTRATE TO BE .073" THICK GLASS.
- NOMINAL PANEL THICKNESS IS .086" ±.008.

BERGQUIST TOUCH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55009			
TITLE: 15.4" DIAGONAL WIDE ANGLE 5-WIRE TOUCH SCREEN			
DRN: MLR	DATE: 11/3/08	SCALE: 1:1	TOL: ±.015
CHKD:	DATE:	PART NUMBER:	DWG REV
APVD:	DATE:	400465	